

AerPOS

15" Bezel Free POS Terminal with
Intel® Core™ i Processor Supported



FEC is proud to introduce AerPOS, the most beautiful and powerful all-in-one POS terminal in FEC's line of products. AerPOS features an ultra slim display, sleek chassis and small footprint design that any business owner would be proud to own. Combined with an Intel® Core i3 or i5 processor, AerPOS can support complicated data processing and heavy loading retail environments.



Features

Supports Intel® vPro Technology

Intel vPro is the combination of processor technologies, hardware enhancements, management features and security technologies that allows remote access to the PC (including monitoring, maintenance, and management) independent of the state of the PC operating system.



One-step Quick Replacement of Key Components for Easy Upgrades


Hardware platform can be easily upgraded by swapping out key components such as motherboard and HDD




Ultra Slim Magnetic Stripe Reader Module

MSR reader measures one centimeter in thickness when installed

I/O Interface

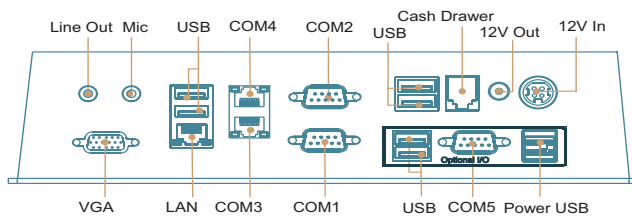

Dimensions

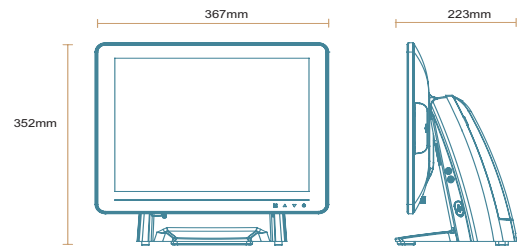

Specifications

Model	AP-3615	AP-3625
Processor	Intel® Celeron® G540, 2.5Ghz Intel® Core i3-2120, 3.3Ghz Intel® Core i5-2400S, 2.5Ghz	Intel® Celeron® B810, 1.6Ghz Intel® Core i5-2510E, 2.5Ghz (vPro)
System Memory	2GB Standard, Maximum 8GB (1x204-pin DDR3)	
Power Supply	150W (12V / 12.5A) External Power Supply	
Storage Device	1 x 2.5" SATA HDD	
Chipset	Intel® H61	Intel® QM67
Speaker	Internal Speaker 2W x 2	
Construction	Aluminum Die-casting + Plastic + Glass	
Housing Color	Black with Silver Trim or White with Silver Trim	
Touch LCD Display		
Size / Resolution	15" TFT-LCD/ 1024 X 768	
Brightness (Backlight Type) & Touch Screen	250 cd/m ² (CCFL); 5-Wire Resistive Touch	
	350 cd/m ² (LED) with Tempered Glass; Projected Capacitive Touch	
I/O Ports		
Serial Port	4 x External: COM1, COM2 (DB9), COM3, COM4 (RJ-45)	
USB Port	5 x External (4 Rear + 1 Side)	
Cash Drawer Port	1 x RJ11 (12V)	
LAN Port	1 x RJ45 Giga LAN	
Audio Port	1 x Line Out, 1 x Mic In	
VGA Port	1 x VGA	
DC Output	1 x 12V DC Jack 2.5 mm	
Optional I/O Board		
Type A	Serial Port: COM5 (DB9); 12V Powered USB Port x 1; USB x 2	
OS Supported		
Windows	Windows XP, POSReady 2009, Windows 7, POSReady 7	
Linux	Per Request	
Physical Dimensions		
Dimensions (W x H x D)	367 x 352 x 223 mm	
Environment		
EMI / Safety	CE, FCC Class A	
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	
Storage Temperature	-10°C ~ 55°C (14°F ~ 131°F)	
Relative Humidity	10% ~ 90% (Non-condensing)	
Optional Peripherals		
Magnetic Stripe Card Reader	Integrated MCR Module (Single / Dual / Triple Track Selectable)	
2nd Display	Integrated 11.6" or 15" LCD Display (Touch Screen Support for 15" Only)	
Customer Display	Integrated LCM / VFD Customer Display	
Wireless LAN	Integrated 802.11 b/g/n Wireless Module	
Identification Devices	RFID 13.56 MHz / Fingerprint Reader / i-Button	