

# Vouge Pro

12" or 15" High-end Slim POS

with Detachable LCD

or VFD Customer Display



The Vouge Pro is a top of the line touch POS terminal designed to operate under the harshest retail and hospitality environments. With a sleek and lean aluminum exterior, small footprint and upright design, the Vouge Pro fits into space-constricted environments while conveying a clean and modern presentation.



## Features

### Space Saving, Small Footprint and Upright Design

Upright elongated design delivers a sophisticated look for high-end environments such as fashion apparel and hotel



### Downward Facing I/O Connector Panel for Countertop Management

Neatly conceals cabling under terminal for workspace




### Detachable Integrated 2nd Display or VFD Display

Optional 2nd display or VFD display is attached without additional poles, mounts or wiring


### Dual HDD Supporting RAID Function

Provides secure data protection as well as a faster and safer data backup

## I/O Interface

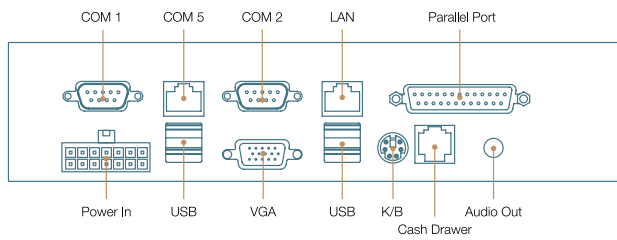

## Dimensions

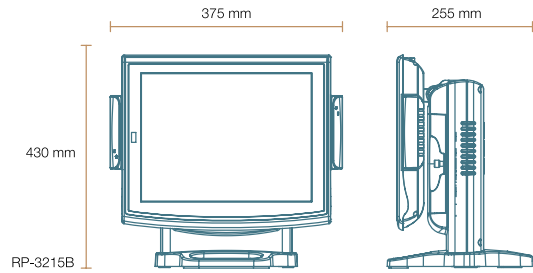

## Specifications

Model	RP-3212B	RP-3215B
Processor	Intel® Celeron® 440, 512K L2 Cache, 2.0Ghz, 800Mhz FSB (HH80557RG041512) Intel® Pentium® E5300, 2M L2 Cache, 2.6Ghz, 800Mhz FSB (AT80571PG0642ML)	
System Memory	1 GB Standard, Maximum 4 GB (2 x 240-pin DDR2)	
Power Supply	250W External Power Supply with 12V/24V Output	
Storage Device	Supports 2 x 2.5 SATA HDD with RAID Function (0, 1), 2nd SATA HDD (Optional)	
Speaker	Internal Speaker 2W x 2	
Construction	Aluminum Die-casting, Plexi-Glass Acrylic (Front Bezel)	
Housing Color	Black	

Touch LCD Display		
Size / Resolution	12.1" TFT LCD / 800 x 600	15" TFT LCD / 1024 x 768
Brightness (Backlight Type)	400 cd/m <sup>2</sup> (CCFL)	250 / 350 cd/m <sup>2</sup> (CCFL)
Touch Screen	5-Wire Resistive Touch	

I/O Ports	
Serial Port	3 x Internal : COM3 (Touch), COM4 (VFD / LCM or 2nd Touch), COM6 (Reserved) 3 x External : COM1 & COM2 (DB9), COM5 (RJ45)
USB Port	3 x Internal (1 WiFi, 1 MSR / 3-in-1, 1 Reserved), 5 x External (1 Side, 4 Bottom)
Printer Port	1 x Bi-directional Parallel Port
Cash Drawer Port	1 x RJ11 (12V)
Keyboard	1 x PS/2
LAN Port	1 x RJ45 Giga LAN
Video Port	1 x VGA
Audio Port	1 x Line-out

OS Supported	
Windows	Windows XP, POSReady 2009, Windows 7, POSReady 7
Linux	Per Request

Physical Dimensions		
Dimensions (WxHxD)	325 x 430 x 255 mm	375 x 430 x 255 mm

Environment	
EMI / Safety	CE, FCC Class A
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-10°C ~ 55°C (14°F ~ 131°F)
Relative Humidity	10% ~ 90% (Non-condensing)

Optional Peripherals	
Magnetic Stripe Card Reader	Integrated MCR Module (Single / Dual / Triple Track Selectable)
2-in-1 / 3-in-1 Module	Integrated MCR + i-Button / MCR + RFID / MCR + Fingerprint / MCR + Smartcard + i-Button
2nd Display	Integrated 12.1" / 15" TFT LCD (Touch Screen Optional)
Customer Display	Integrated VFD / LCM Customer Pole-Display
Wireless LAN	Integrated 802.11 b/g/n Wireless Module